



Product Description

MHN-TD

Double-ended quartz Metal-halide lamp

Benefits

- All types are UV-Block for reduced health and fading risks

Features

- Quartz discharge tube containing high-pressure mercury and a mixture of dysprosium, holmium and thulium halides (4200 K) or tin iodide (3000 K), with sodium and thallium added for color correction and arc stabilization
- Double-ended lamps housed in a tubular clear UV-Block quartz evacuated outer envelope
- Restricted burning position

Application

- Indoors - accent lighting, general lighting in downlighters, e.g. in shops and malls
- Downlighters, uplighters and wall-washers, e.g. in shops and malls
- Outdoors - floodlighting monuments, facades and billboards


Versions



MHN-TD, RX7s

MHN-TD, FC2

Dimensional drawing

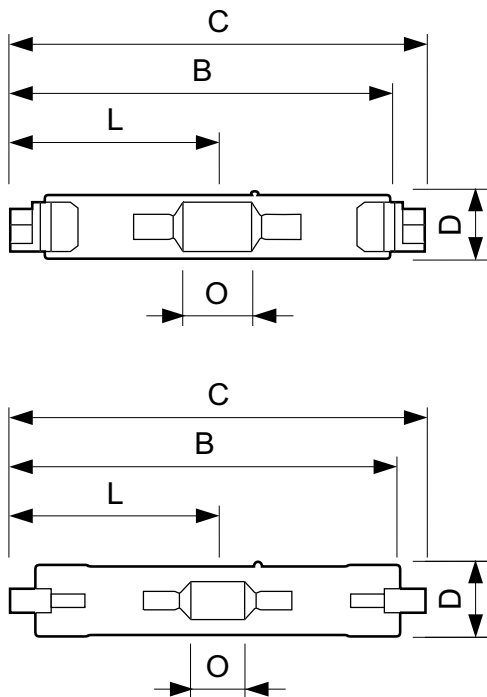

Product	D (max)	D	O	C (max)
MHN-TD 250W/842 FC2 1CT/12	27.5 mm	1.08 in	27 mm	161.6 mm

Product	D (max)	D	O	C (max)
MHN-TD 70W/842 RX7s 1CT/12	19.5 mm	0.75 in	7.7 mm	117.6 mm
MHN-TD 70W/842 Rx7s 1CT/12	19.5 mm	0.75 in	7.7 mm	117.6 mm
MHN-TD 150W/842 RX7S 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm
MHN-TD 150W/730 RX7s 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm
MHN-TD 70W/730 RX7s 1CT/12	19.5 mm	0.75 in	7.7 mm	117.6 mm
MHN-TD 70W/730 Rx7s 1CT/12	19.5 mm	0.75 in	7.7 mm	117.6 mm
MHN-TD 150W/730 RX7S 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm
MHN-TD 150W/842 RX7s 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm

Controls and Dimming

Dimmable No

General Information

Life To 5% Failures (Min) 4000 h

Life To 5% Failures (Nom) 5000 h

Operating Position P45

Mechanical and Housing

Bulb Finish Clear

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/ 1000 h	Energy Efficiency Label (EEL)	Mercury (Hg) Content (Nom)
928070205190	MHN-TD 70W/842 RX7s 1CT/12	82 kWh	A	11 mg
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	82 kWh	A	11 mg
928076505190	MHN-TD 150W/842 RX7s 1CT/12	165 kWh	A+	13 mg
928076505193	MHN-TD 150W/842 RX7S 1CT/12	165 kWh	A+	13 mg
928482400092	MHN-TD 70W/730 RX7s 1CT/12	77 kWh	A+	13.4 mg

Order Code	Full Product Name	Energy Consumption kWh/ 1000 h	Energy Efficiency Label (EEL)	Mercury (Hg) Content (Nom)
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	77 kWh	A+	13.4 mg
928482500092	MHN-TD 150W/730 RX7s 1CT/12	165 kWh	A+	12.4 mg
928482500093	MHN-TD 150W/730 RX7S 1CT/12	165 kWh	A+	12.4 mg
928078605121	MHN-TD 250W/842 FC2 1CT/12	277 kWh	A+	16 mg

Operating and Electrical

Order Code	Full Product Name	Lamp Current (EM) (Nom)	Voltage (Max)	Voltage (Min)	Voltage (Nom)	Power (Rated) (Nom)
928070205190	MHN-TD 70W/842 RX7s 1CT/12	1.0 A	100 V	80 V	90 V	75.0 W
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	1.0 A	100 V	80 V	90 V	75.0 W
928076505190	MHN-TD 150W/842 RX7s 1CT/12	1.8 A	108 V	88 V	98 V	150.0 W
928076505193	MHN-TD 150W/842 RX7S 1CT/12	1.8 A	108 V	88 V	98 V	150.0 W
928482400092	MHN-TD 70W/730 RX7s 1CT/12	0.98 A	98 V	78 V	90 V	75.0 W
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	0.98 A	98 V	78 V	90 V	75.0 W
928482500092	MHN-TD 150W/730 RX7s 1CT/12	1.8 A	106 V	86 V	96 V	150.0 W
928482500093	MHN-TD 150W/730 RX7S 1CT/12	1.8 A	106 V	86 V	96 V	150.0 W
928078605121	MHN-TD 250W/842 FC2 1CT/12	3 A	110 V	90 V	100 V	252.0 W

General Information

Order Code	Full Product Name	Cap-Base	Life To 20% Failures (Min)	Life To 20% Failures (Nom)	Life To 50% Failures (Min)	Life To 50% Failures (Nom)
928070205190	MHN-TD 70W/842 RX7s 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928076505190	MHN-TD 150W/842 RX7s 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928076505193	MHN-TD 150W/842 RX7S 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928482400092	MHN-TD 70W/730 RX7s 1CT/12	RX7S	5800 h	7000 h	7500 h	9000 h
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	RX7S	5800 h	7000 h	7500 h	9000 h
928482500092	MHN-TD 150W/730 RX7s 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928482500093	MHN-TD 150W/730 RX7S 1CT/12	RX7S	6500 h	8000 h	8500 h	10500 h
928078605121	MHN-TD 250W/842 FC2 1CT/12	FC2	5800 h	7000 h	7500 h	9000 h

Luminaire Design Requirements

Order Code	Full Product Name	Bulb Temperature (Max)
928070205190	MHN-TD 70W/842 RX7s 1CT/12	500 °C
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	500 °C
928076505190	MHN-TD 150W/842 RX7s 1CT/12	650 °C
928076505193	MHN-TD 150W/842 RX7S 1CT/12	650 °C
928482400092	MHN-TD 70W/730 RX7s 1CT/12	500 °C

Order Code	Full Product Name	Bulb Temperature (Max)
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	500 °C
928482500092	MHN-TD 150W/730 RX7s 1CT/12	650 °C
928482500093	MHN-TD 150W/730 RX7S 1CT/12	650 °C
928078605121	MHN-TD 250W/842 FC2 1CT/12	650 °C

Light Technical (1/2)

Order Code	Full Product Name	Chromaticity Coordinate X	Chromaticity Coordinate Y	Color Code	Color Designation	Correlated Color Temperature (Nom)	Color Rendering Index (Nom)	Lumen Maintenance 10000 h (Min)
		(Nom)	(Nom)					
928070205190	MHN-TD 70W/842 RX7s 1CT/12	370	370	842	Cool White (CW)	4200 K	80	40 %
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	370	370	842	Cool White (CW)	4200 K	80	40 %
928076505190	MHN-TD 150W/842 RX7s 1CT/12	370	370	842	Cool White (CW)	4200 K	85	60 %
928076505193	MHN-TD 150W/842 RX7S 1CT/12	370	370	842	Cool White (CW)	4200 K	85	60 %
928482400092	MHN-TD 70W/730 RX7s 1CT/12	434	400	730	Warm White (WW)	3000 K	70	45 %
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	434	400	730	Warm White (WW)	3000 K	70	45 %
928482500092	MHN-TD 150W/730 RX7s 1CT/12	434	400	730	Warm White (WW)	3000 K	70	50 %
928482500093	MHN-TD 150W/730 RX7S 1CT/12	434	400	730	Warm White (WW)	3000 K	70	50 %
928078605121	MHN-TD 250W/842 FC2 1CT/12	370	370	842	Cool White (CW)	4200 K	85	50 %

Light Technical (2/2)

Order Code	Full Product Name	Lumen Maintenance 10000 h (Nom)	Lumen Maintenance 2000 h (Min)	Lumen Maintenance 2000 h (Nom)	Lumen Maintenance 5000 h (Min)	Lumen Maintenance 5000 h (Nom)	Luminous Efficacy (rated) (Min)	Luminous Efficacy (rated) (Nom)	Luminous Flux (Rated) (Min)	Luminous Flux (Rated) (Nom)
928070205190	MHN-TD 70W/842 RX7s 1CT/12	75 %	79 %	85 %	68 %	80 %	-	76 lm/W	5000 lm	5700 lm
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	75 %	79 %	85 %	68 %	80 %	-	76 lm/W	5000 lm	5700 lm
928076505190	MHN-TD 150W/842 RX7s 1CT/12	70 %	74 %	80 %	68 %	75 %	75 lm/W	86 lm/W	11600 lm	12900 lm
928076505193	MHN-TD 150W/842 RX7S 1CT/12	70 %	74 %	80 %	68 %	75 %	75 lm/W	86 lm/W	11600 lm	12900 lm
928482400092	MHN-TD 70W/730 RX7s 1CT/12	55 %	59 %	65 %	53 %	60 %	-	80 lm/W	5200 lm	6000 lm
928482400093	MHN-TD 70W/730 Rx7s 1CT/12	55 %	59 %	65 %	53 %	60 %	-	80 lm/W	5200 lm	6000 lm
928482500092	MHN-TD 150W/730 RX7s 1CT/12	60 %	69 %	75 %	58 %	65 %	76 lm/W	87 lm/W	12200 lm	13800 lm
928482500093	MHN-TD 150W/730 RX7S 1CT/12	60 %	69 %	75 %	58 %	65 %	76 lm/W	87 lm/W	12200 lm	13800 lm
928078605121	MHN-TD 250W/842 FC2 1CT/12	60 %	69 %	75 %	63 %	70 %	-	80 lm/W	18000 lm	20000 lm


Mechanical and Housing

Order Code	Full Product Name	Bulb Shape	Order Code	Full Product Name	Bulb Shape
928070205190	MHN-TD 70W/842 RX7s 1CT/12	TD	928482400093	MHN-TD 70W/730 Rx7s 1CT/12	TD
928070205193	MHN-TD 70W/842 Rx7s 1CT/12	TD	928482500092	MHN-TD 150W/730 RX7s 1CT/12	TD
928076505190	MHN-TD 150W/842 RX7s 1CT/12	TD	928482500093	MHN-TD 150W/730 RX7S 1CT/12	TD
928076505193	MHN-TD 150W/842 RX7S 1CT/12	TD	928078605121	MHN-TD 250W/842 FC2 1CT/12	T27
928482400092	MHN-TD 70W/730 RX7s 1CT/12	TD			

Color Rendering Diagrams



Light Distribution Diagrams

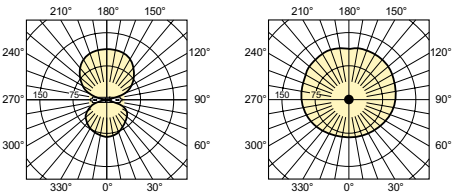

MHN-TD

